




CADENAS AUTOLUBRICADA SLR (SELF-LUBRICATION ROLLER CHAINS)

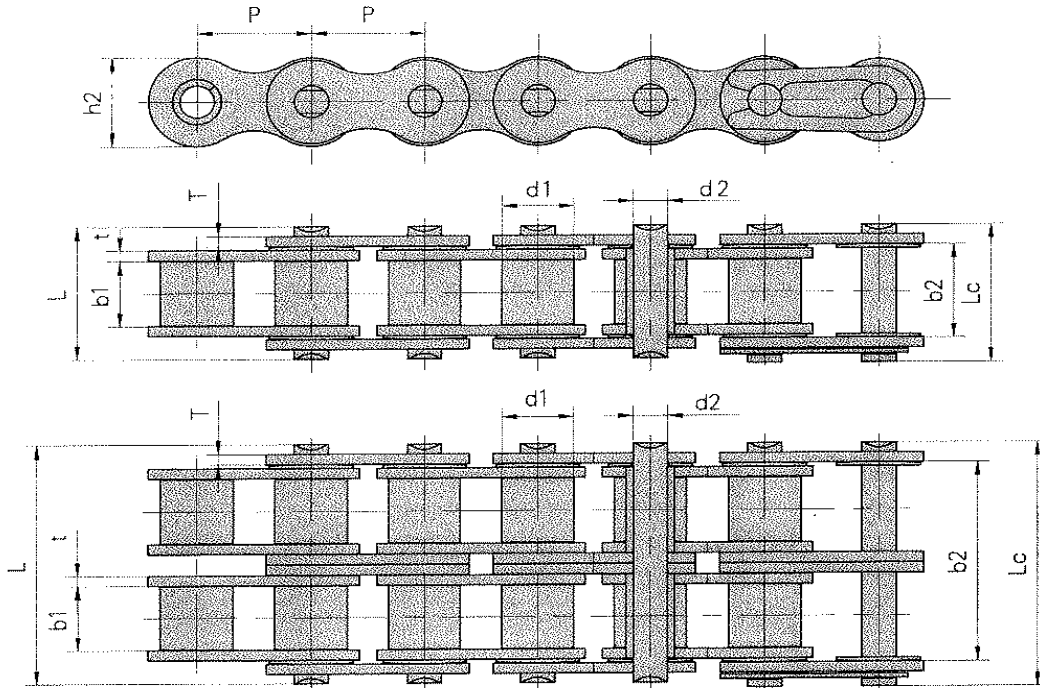

Donghua Chain No.	Pitch	Roller diameter	Width between inner plates	Width between outer plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	b2 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kg/m
60SLR	19.05	11.91	12.57	19.35	5.94	27.5	29.3	18.0	3.25/2.42	34.2/7772	1.65
08BSLR	12.70	8.51	7.75	13.03	4.45	18.3	19.8	11.8	1.6	18.0/4091	0.73
08BSLRF1	12.70	8.51	7.75	11.75	4.45	17.3	18.7	11.8	1.6	18.0/4091	0.72
10BSLRF1	15.875	10.16	9.65	13.75	5.08	19.9	21.6	14.7	1.7	22.4/5091	0.97
12BSLR	19.05	12.07	11.68	15.75	5.72	22.5	24.2	16.0	1.85	29.0/6591	1.20
12BSLRF1	19.05	12.07	11.68	16.13	5.72	22.9	24.7	16.0	1.85	29.0/6591	1.19
16BSLR	25.40	15.88	17.02	27.50	8.28	38.1	40.6	21.0	4.15/3.1	60.0/13636	2.72
16BSLRF1	25.40	15.88	17.02	26.15	8.28	36.7	39.7	21.0	4.15/3.1	60.0/13636	2.72
60SLR-2	19.05	11.91	12.57	42.13	5.94	50.3	52.1	18.0	3.25/2.42	68.4/15544	3.21
12BSLR-2	19.05	12.07	11.68	35.21	5.72	42.0	43.6	16.0	1.85	58.0/13182	2.42
16BSLR-2	25.4	15.88	17.02	57.46	8.28	68.0	71.0	21.0	4.15/3.1	106.0/23847	5.68