


CADENAS TRANSPORTADORAS DE EJES MACIZOS SERIE MT

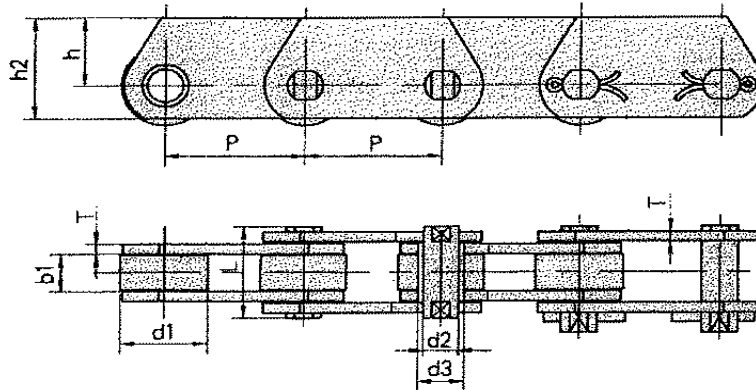

DIN Chain No.	Pitch			Roller diameter		Pin diameter		Bush diameter		Plate thickness	
	P	d1	d2	d3	T	d1	d2	d3	T		
	mm	mm	mm	mm	mm	mm	mm	mm	mm		
MT20	40.0	50.0	63.0	80.0	100.0	25.0	6.0	9.0	2.5		
MT28	50.0	63.0	80.0	100.0	125.0	30.0	7.0	10.0	3.0		
MT40	63.0	80.0	100.0	125.0	160.0	36.0	8.5	12.5	3.5		
MT56	63.0	80.0	100.0	125.0	160.0	42.0	10.0	15.0	4.0		
MT80	80.0	100.0	125.0	160.0	200.0	50.0	12.0	18.0	5.0		
MT112	80.0	100.0	125.0	160.0	200.0	60.0	15.0	21.0	6.0		
MT160	100.0	125.0	160.0	200.0	250.0	70.0	18.0	25.0	7.0		
MT224	125.0	160.0	200.0	250.0	315.0	85.0	21.0	30.0	8.0		
MT315	160.0	200.0	250.0	315.0	400.0	100.0	25.0	36.0	10.0		
MT450	200.0	250.0	315.0	400.0	500.0	120.0	30.0	42.0	12.0		

DIN Chain No.	Width between inner plates		Pin length		Plate depth		Ultimate tensile strength	
	b1	L	h2	h	Q	*Q		
	min	max	max	max	min	min		
	mm	mm	mm	mm	kN/LB	kN/LB		
MT20	16.0	35.0	25.0	16.0	20.0/4545	32.0/7270		
MT28	18.0	40.0	30.0	20.0	28.0/6364	42.0/9545		
MT40	20.0	45.0	35.0	22.5	40.0/9091	60.0/13635		
MT56	24.0	52.0	45.0	30.0	56.0/12727	85.0/19318		
MT80	28.0	62.0	50.0	32.5	80.0/18182	125.0/28408		
MT112	32.0	73.0	60.0	40.0	112.0/25454	175.0/39768		
MT160	37.0	85.0	70.0	45.0	160.0/36364	260.0/59090		
MT224	43.0	98.0	90.0	60.0	224.0/50909	340.0/77272		
MT315	48.0	112.0	100.0	65.0	315.0/71591	520.0/118180		
MT450	56.0	135.0	120.0	80.0	450.0/102272	700.0/159089		

* Q Mayor carga de rotura con mallas endurecidas.

