


# Motorcycle chains

## Cadenas de Moto

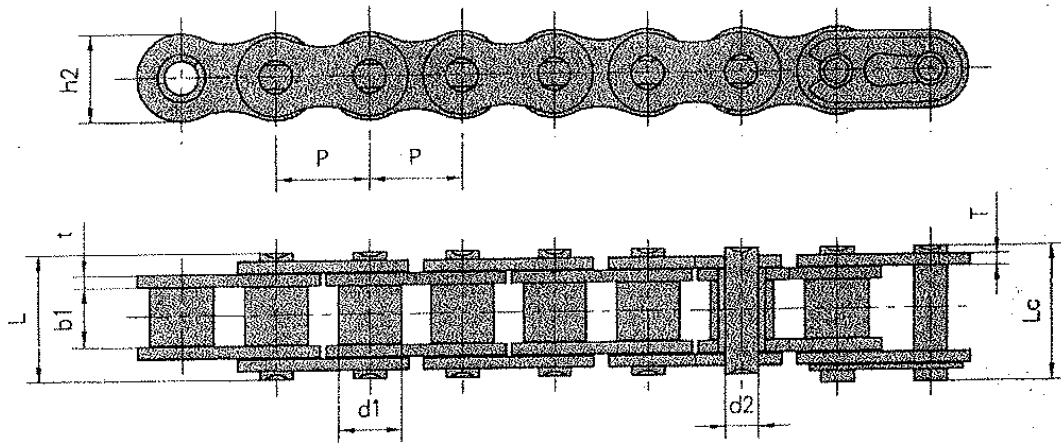

Chain No.	Pitch P	Roller diameter d1 max	Width between inner plates b1 min	Pin diameter d2 max	Pin length L max	Pin length Lc max	Inner plate depth h2 max	Plate thickness v/T max	Ultimate tensile strength Q min	Average tensile strength Q0	Weight per meter q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
*25H	6.350	3.30	3.18	2.31	8.90	9.5	6.00	1.04	4.80/1091	5.5	0.17
*25H(E)	6.350	3.30	3.18	2.31	8.90	9.5	6.00	1.04	5.80/1305	6.0	0.18
*219H	7.774	4.59	5.00	3.01	11.90	12.7	7.40	1.2/1.04	6.60/1500	7.4	0.28
*270H	8.500	5.00	4.75	3.28	13.15		8.45	1.8/1.4	9.80/2227	11.0	0.33
*T3F	9.525	6.00	9.50	4.50	18.60		9.30	1.85/1.50	11.80/2682	14.1	0.61
420	12.700	7.77	6.25	3.96	14.70	16.1	12.00	1.50	16.00/3636	18.1	0.55
428	12.700	8.51	7.75	4.45	16.70	18.2	11.80	1.60	18.0/4091	20.1	0.70
428H	12.700	8.51	7.85	4.45	18.80	19.9	11.80	2.03	20.60/4682	23.4	0.79
428HSH	12.700	8.51	7.75	4.45	20.00		12.00	2.42	27.00/6074	29.4	0.89
428HF1	12.700	8.51	7.85	4.45	17.90	19.0	11.80	1.80	19.50/4387	20.7	0.74
428DS	12.700	8.51	7.94	4.45	17.90	19.3	12.00	1.85	18.62/4232	21.0	0.76
520	15.875	10.16	6.25	5.08	17.50	19.0	15.09	2.03	26.50/6022	29.7	0.89
520H	15.875	10.16	6.25	5.08	19.30	20.8	15.09	2.42	26.50/6022	31.5	1.10
525	15.875	10.16	7.95	5.08	19.30	20.7	15.09	2.03	26.50/6022	29.9	1.06
525H	15.875	10.16	7.95	5.08	20.90	22.3	15.09	2.42	26.50/6022	29.9	1.20
530	15.875	10.16	9.40	5.08	20.70	22.2	15.09	2.03	26.50/6022	29.7	1.06
530SH	15.875	10.16	9.40	5.08	22.10		15.09	2.42	32.80/7379	33.5	1.24

\*Bushing chain: d1 in the table indicate the external diameter of the bushing.