


## 1.18 Cadenas de Rodillos con ejes prolongados

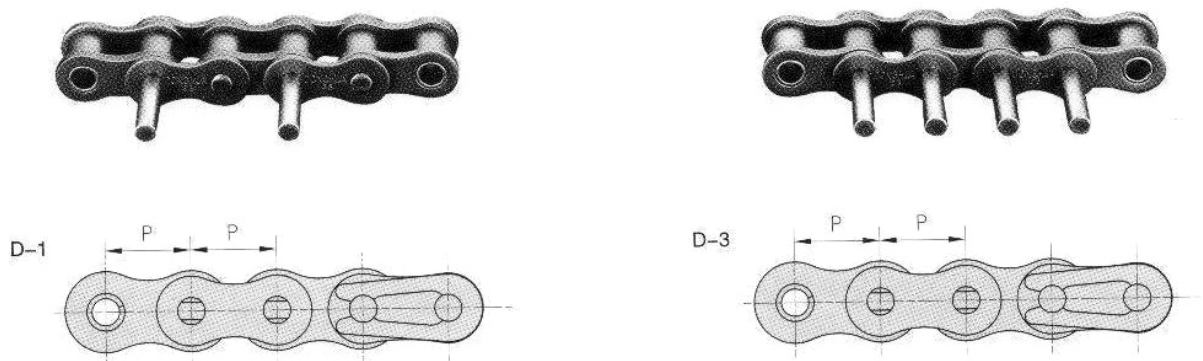

REF. ISO	PASO P mm	ANCHO INTERIOR B mm	Ø del rodillo C mm	Ø del eje D mm	Eje corto		Eje normal		Eje largo		Carga de rotura Δ daN
					E mm	F mm	E mm	F mm	E mm	F mm	
06-B	9,525	5,72	6,35	3,28	9,52	14,8	11,3	16,4	21,5	26,6	1000
08-B	12,70	7,75	8,51	4,45	9,52	16,8	15,5	22,5	29,5	36,5	2000
84	12,70	4,88	7,75	4,09	9,52	15	15	20,5	25	30,4	1400
10-B	15,875	9,65	10,16	5,08	11,91	20,2	17,8	26,2	34,4	42,8	2500
12-B	19,05	11,68	12,07	5,72	14,30	24,0	20,7	30,4	40,2	50	3200
16-B	25,4	17,02	15,88	8,28	19,05	35,0	35,0	33,2	65	81	6500