


### 2.06 Casquillos cónico "Taper bushes"

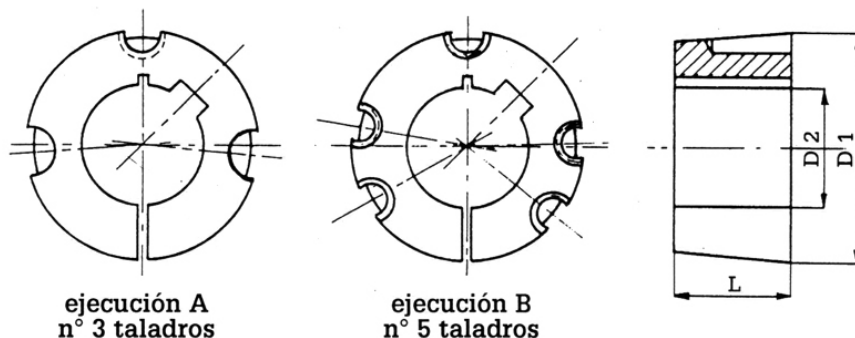

Referencia N.	Ejecucion	L	D <sub>1</sub>	Agujeros standard (con chavetero s/DIN 6885/1)	Taladros roscados	Par de apriete EN Nm
1008	A	22	35	10-12-14-16-18-19-20-22-24-25	1/4" x 1/2"	5,6
1108	A	22	38	14-19-20-24-25	1/4" x 1/2"	5,6
1210	A	25	47,5	14-16-18-19-20-24-25-28-30-32	3/8" x 5/8"	19,6
1215	A	38	47,5	14-19-20-24-25-28	3/8" x 5/8"	19,6
1610	A	25	57	14-16-19-20-24-25-28-30-32-35-38-40-42	3/8" x 5/8"	19,6
1615	A	38	57	19-20-22-24-25-28-30-32-35-38-40	3/8" x 5/8"	19,6
2012	A	32	70	19-20-24-25-28-30-32-35-38-40-42-45-48-50	7/16" x 7/8"	30,4
2517	A	45	85,5	19-20-24-25-28-30-32-35-38-40-42-45-48-50-55-60-65	1/2" x 1"	48
3020	A	51	108	28-30-32-35-38-40-42-45-48-50-55-60-65-70-75	5/8" x 1" 1/4"	90
3030	A	76	108	38-42-45-48-50-55-60	5/8" x 1" 1/4"	90
3525	B	65	127	38-40-42-45-48-50-55-60-65-70-75-80	1/2" x 1" 1/2"	113
3535	B	89	127	40-42-45-48-50-55-60-65-70-75-80-85-90	1/2" x 1" 1/2"	113
4040	B	102	146	50-55-60-65-70-75-80-85-90-95	5/8" x 1" 3/4"	169
4545	B	115	162	65-70-75-80-85-90-95-100-110	3/4" x 2"	192
5050	B	127	177,6	70-75-80-85-90-95-100-110-115-120-125	7/8" x 2" 1/4"	272

Todos los casquillos "Taper-Lock"® son numerados por un sistema internacional que permite identificar velozmente el diámetro máximo del agujero y el ancho del cubo.

Todos los chaveteros están unificados a la Norma DIN-6885/1